


AI Presforbindere - ikke træksikre

AI PRESSVERBINDER - ZUGENTLASTETE
AI COMPRESSION JOINTS NON-TENSION



6 kt. presning

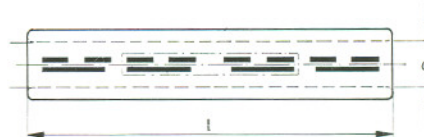

Bestillings nr.	mm ²		Kode- tal	Leder ømm	mm		El nr.	Internt nr.
	rm/sm	re/se			d	l		
16 ALU-ZE	16	25	12	5,1	5,6	55	95 10 222 609	
25 ALU-ZE	25	35	12	6,3	7,0	70	95 10 221 008	
35 ALU-ZE	35	50	14	7,5	8,0	85	95 10 221 105	
50 ALU-ZE	50	70	16	9,0	10,0	85	95 10 221 202	
70 ALU-ZE	70	95	18	10,5	11,5	105	95 10 221 309	
95 ALU-ZE	95	120	22	12,5	13,5	105	95 10 221 406	
120 ALU-ZE	120	150	22	14,0	15,0	105	95 10 221 503	
150 ALU-ZE	150	185	25	15,7	16,5	125	95 10 221 600	
185 ALU-ZE	185	240	28	17,5	18,3	125	95 10 221 707	
240 ALU-ZE	240	300	32	20,2	21,5	145	95 10 221 804	
300 ALU-ZE	300		34	22,5	24,0	145	95 10 221 901	
400 ALU-ZE	400		42	26,0	28,1	250	95 10 222 706	
500 ALU-ZE	500		46	29,1	31,9	330	95 10 222 803	
625 ALU-ZE	625		52	32,6	35,0	330	95 10 222 900	
800 ALU-ZE	800		58	36,8	40,0	330	95 10 218 804	
1000 ALU-ZE	1000		60	41,1	44,0	330	95 10 218 901	

rm/sm = rund flerkoret/sektor flerkoret

re/se = rund massiv/sektor massiv

