


C-klemmer

Af elektrolytkobber.

For samling og afgrening af jord og lynafleder.
6-300 mm².

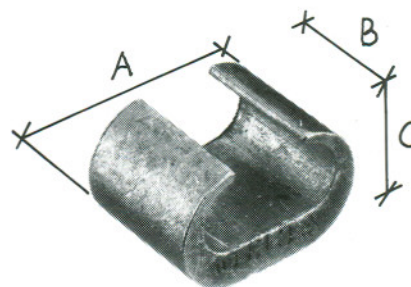

Bestillings nr.	Afgreninger mm ²	C-afgreninger for linier front montering mm ²	Mål mm			El nr.	Internt nr.
			a	b	c		
C4	10/6-10	10/6	13	12	8	95 21 000 506	
C5	10-16/10-16	10/16	16	15	10	95 21 000 522	
C6	16-25/16-25	16/16-25	19	16	12	95 21 000 535	
C8-6	25-35/16-25	25/16-25	27	23	18	95 21 000 548	
C8	25-35/25-35	25/25-35	27	23	18	95 21 000 551	
C9-6	35-50/16-25	35/16-25	28	23	18	95 21 000 564	
C9-8	35-50/25-35	35/25-35	28	23	18	95 21 000 577	
C9	35-50/35-50	35/35-50	28	23	18	95 21 000 580	
C11-8	50-70/25-35	50/25-35	31	23	19	95 21 000 593	
C11-9	50-70/35-50	50/35-50	31	23	19	95 21 000 603	
C11	50-70/50-70	50/50-70	31	23	19	95 21 000 616	
C13-8	70-95/25-35	70/25-35	35	25	22	95 21 000 629	
C13-9	70-95/35-50	70/35-50	35	25	22	95 21 000 632	
C13-11	70-95/50-70	70/50-70	35	25	22	95 21 000 645	
C13	70-95/70-95	70/70-95	35	25	22	95 21 000 658	
C15-8	95-120/25-35	95/25-35	41	30	26	95 21 000 661	
C15-9	95-120/35-50 ¹⁾	95/35-50	41	30	26	95 21 000 713	
C15-11	95-120/50-70	95/50-70	41	30	26	95 21 000 726	
C15-13	95-120/70-95 ²⁾	95/70-95	41	30	26	95 21 000 739	
C15	95-120/95-120	95/95	41	30	26	95 21 000 742	
C16-9	120-150/35-50	120-150/35-50	53	35	30	95 21 000 755	
C16-13	120-150/70-95	120-150/70-95	53	35	30	95 21 000 768	
C16	120-150/120-150	120-150/120-150	53	35	30	95 21 000 771	
C18-8	150-185/35	150-185/35	55	40	34	95 21 000 690	
C18-9	150-185/50	150-185/50	55	40	34	95 21 000 784	
C18-11	150-185/70	150-185/70	55	40	34	95 21 000 797	
C18-13	150-185/95	150-185/95	55	40	34	95 21 000 807	
C18-15	150-185/120	150-185/120	55	40	34	95 21 000 810	
C18-16	150-185/150	150-185/150	55	40	34	95 21 000 823	
C18	185/185	185/185	60	40	34	95 21 000 836	
C21-13	240/95	240/95	55	40	34	95 21 000 849	
C21-18	240/185	240/185	70	40	40	95 21 000 852	
C21	240/240	240/240	70	40	40	95 21 000 865	
C23-16	300/120-150	300/120-150	70	40	40	95 21 000 878	
C23	300/300	300/300	70	40	40	95 21 000 881	

¹⁾ Kun for kontaktpresning af Cu-line 16, 25 eller 35 mm² til jord elektrode.

²⁾ Kun for kontaktpresning af Cu-line 50, 70 eller 95 mm² til jord elektrode.

