


Cu Prespindbolte - ikke træksikre

Cu PRESSANSCHLÜSSE ZUGENTLASTETE

Cu PIN-TYPE COMPRESSION TERMINALS NON-TENSION



6 kt. presning

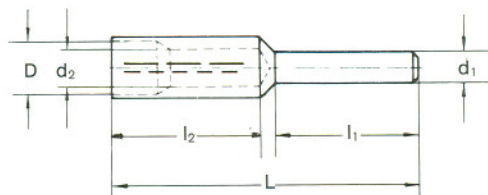

Bestillings nr.	mm ²	Leder Ø mm	Ko- de- tal	L	D	Mål i mm				El nr.	Internt nr.
						d ₁	d ₂	l ₁	l ₂		
10Cu P 6	10	4,1	8	52	8,5	6	4,5	22	25	95-10 002 654	
16Cu P 6	16	5,1	8	52	8,5	6	5,5	22	25	95 10 002 667	
25Cu P 6	25	6,3	10	52	10,2	6	7,0	22	25	95 10 002 670	
35Cu P 8	35	7,5	12	80	12,2	8	8,2	45	30	95 10 002 683	
50Cu P 8	50	9,0	14	80	14,5	8	10,0	45	30	95 10 002 696	
70Cu P10	70	10,5	16	90	15,5	10	11,2	50	35	95 10 002 706	
95Cu P12	95	12,5	18	100	19,0	12	13,5	50	45	95 10 002 719	
120Cu P12	120	14,0	20	100	21,0	12	15,0	50	45	95 10 002 722	
150Cu P12	150	15,8	22	100	23,5	12	16,5	50	45	95 10 002 735	
185Cu P14	185	17,5	25	100	25,5	14	18,5	50	45	95 10 002 748	
240Cu P16	240	20,3	28	100	29,0	16	21,0	50	45	95 10 002 751	

Andre mm² på forespørgsel