
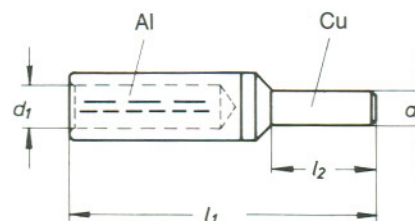


Al-Cu Prespindbolte - ikke træksikre

Al-Cu PRESSANSCHLÜSSE - ZUGENTLASTETE

Al-Cu PIN-TYPE COMPRESSION TERMINALS - NON-TENSION

 6 kt. presning



Bestillings nr.	mm ²		Leder ∅mm mm	Kode- tal	mm				El nr.	Internt nr.
	rm/sm	re/se			d ₁	d ₂	l ₁	l ₂		
25 ALU-KU-PA	25	35	6,3	12	6,8	6	58	20	95 10 245 301	
35 ALU-KU-PA	35	50	7,5	14	8,0	7	71	22	95 10 245 408	
50 ALU-KU-PA	50	70	9,0	16	10,0	8	74	25	95 10 245 505	
70 ALU-KU-PA	70	95	10,5	18	11,5	10	87	30	95 10 245 602	
95 ALU-KU-PA	95	120	12,5	22	13,5	12	91	33	95 10 245 709	
120 ALU-KU-PA	120	150	14,0	22	15,0	12	98	38	95 10 245 806	
150 ALU-KU-PA	150	185	15,7	25	16,5	12	108	38	95 10 245 903	
185 ALU-KU-PA	185	240	17,5	28	18,3	14	116	44	95 10 246 009	
240 ALU-KU-PA	240	300	20,2	32	21,5	16	128	44	95 10 246 106	
300 ALU-KU-PA	300	-	22,5	38	23,5	18	131	46	95 10 246 203	

Specielle Al-Cu Prespindbolte - ikke træksikre

SPEZIELLE Al-Cu PRESSANSCHLÜSSE - ZUGENTLASTETE

SPECIAL Al-Cu PIN TYPE COMPRESSION TERMINALS - NON-TENSION

Bestillings nr.	mm ²		Leder ∅mm mm	Kode- tal	mm				El nr.	Internt nr.
	rm/sm	re/se			d ₁	d ₂	l ₁	l ₂		
25-6-80-BA	35	50	7,5	14	8,0	7	100	30	95 10 246 300	
21-6-80-BA	35	50	7,5	14	8,0	10	120	55	95 10 246 407	
22-6-80-BA	70	95	10,5	18	11,5	10	128	55	95 10 246 504	
23-6-80-BA	120	150	14,0	22	15,0	10	128	55	95 10 246 601	

rm/sm = rund flerkoret/sekter flerkoret

re/se = rund massiv/sekter massiv

Andre mm² på forespørgsel

